





CANADA TRAILERS

MANUFACTURING LIMITED

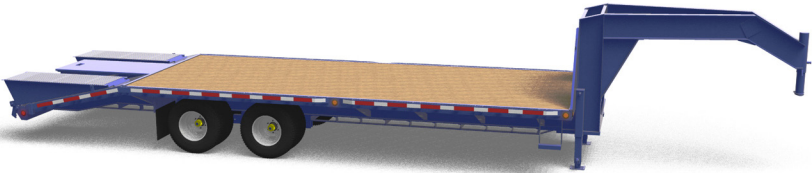

Canada Trailers Manufacturing Limited
11918 Imperial Road, Hwy. 73
Aylmer, Ontario
N5H 2R3

Phone: 519.765.1717
Fax: 519.765.1725


www.canadatrailers.com



Canada Trailers Manufacturing Limited
11918 Imperial Road, Hwy. 73
Aylmer, ON N5H 2R3
Phone: 519.765.1717
Fax: 519.765.1725

Table of Contents

Single Axle Steel Side Utility Trailers	2
Mini-Tandem Steel Side Utility Trailers	3
Single Axle Flat Deck Utility Trailers	4
Mini-Tandem Flat Deck Utility Trailers	5
Tandem Axle Steel Side Utility/Landscape Trailers	6
H.D. Tandem Axle Steel Side Landscape Trailers	7
Car Trailers	8
Equipment Trailers	9
Scissor Lift Trailers	10
Single Axle Gravity Tilt Trailers	11
Hydraulic Power-Tilt Trailers	12
Gravity Split Tilt Trailers	13
Single Axle Dump Trailers	14
Heavy Duty Dump Trailers	15
Ultra Duty Dump Trailers	16
83" Wide Ultra Duty Dump Trailers	17
Straight Deck Pintle Series Trailers	18
Straight Deck Gooseneck Series Trailers	19
Beavertail Pintle Series Trailers	20
Beavertail Gooseneck Series Trailers	21
Premium Pintle Series Trailers	22
Premium Gooseneck Series Trailers	23
Deck Over Hydraulic Tilt Trailers	24

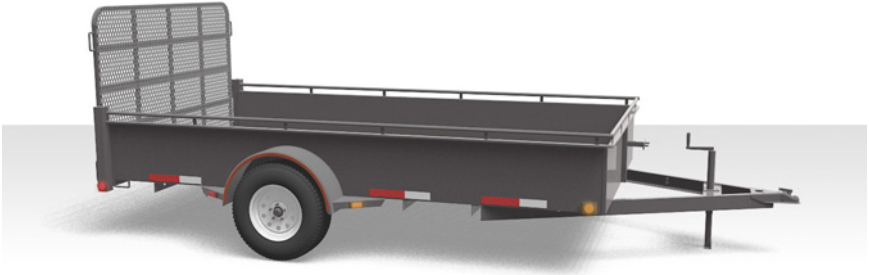

Standard Features & Specifications

GVWR:	1,356 kg (2,990 lbs.)
Axle(s) & Suspension:	(1) 3,500 lbs. Axle w/ Easy Lube Spindles, Double Eye Spring Suspension
Tires:	ST205/75R15 LRC Radial
Coupler:	2" A-frame Coupler
Jack:	2,000 lbs. A-frame Jack
Deck Height:	17"
Sides:	16" Solid Steel + 3" Tie Rail
Ramp:	4' Straight Ramp w/ Mesh
Floor:	Pressure Treated Wood
Tongue Length:	4' Models: 40" 5' Models: 42" 6' Models: 46"
Tie Downs:	(4) Welded In D-rings
Spare Tire Mount:	Front of Bed, Upright
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 4-way Flat Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options


Spare Tire	Torsion Axle
Bifold Ramp	Electric Brakes
Additional D-rings	Aluminum Wheels
5K Axle	Galvanize Trailer

Models

UT48-3K	50" x 98"	344 kg (758 lbs.)
UT58-3K	60.5" x 98"	370 kg (815 lbs.)
UT510-3K	60.5" x 122"	402 kg (887 lbs.)
UT512-3K	60.5" x 146"	441 kg (972 lbs.)
UT514-3K	60.5" x 170"	469 kg (1,033 lbs.)
UT610-3K	72" x 122"	447 kg (985 lbs.)
UT612-3k	72" x 146"	491 kg (1,083 lbs.)
UT614-3K	72" x 168"	535 kg (1,179 lbs.)
UT712-3K	81" x 146"	537 kg (1,183 lbs.)
UT714-3k	81" x 168"	564 kg (1,244 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca

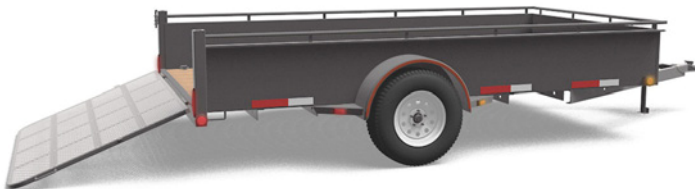



Standard Features & Specifications

GVWR:	1,356 kg (2,990 lbs.)
Axle(s) & Suspension:	(2) 2,200 lbs. Axles w/ Easy Lube Spindles, Double Eye Spring Suspension
Tires:	ST175/80R13 LRC Radial
Coupler:	2" A-frame Coupler
Jack:	2,000 lbs. A-frame Jack
Deck Height:	16"
Sides:	16" Solid Steel + 3" Tie Rail
Ramp:	4' Straight Ramp w/ Mesh
Floor:	Pressure Treated Wood
Tongue Length:	4' Models: 40" 5' Models: 42" 6' Models: 46"
Tie Downs:	(4) Welded In D-rings
Spare Tire Mount:	Front of Bed, Upright
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 4-way Flat Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options

Spare Tire	Torsion Axles
Bifold Ramp	Aluminum Wheels
Additional D-Rings	Galvanize Trailer


Models

MT-UT48-3K	50" x 98"	412 kg (909 lbs.)
MT-UT58-3K	60.5" x 98"	435 kg (958 lbs.)
MT-UT510-3K	60.5" x 122"	469 kg (1,034 lbs.)
MT-UT512-3K	60.5" x 146"	508 kg (1,119 lbs.)
MT-UT514-3K	60.5" x 170"	534 kg (1,177 lbs.)
MT-UT610-3K	72" x 122"	519 kg (1,144 lbs.)
MT-UT612-3K	72" x 146"	556 kg (1,226 lbs.)
MT-UT614-3K	72" x 168"	593 kg (1,307 lbs.)
MT-UT616-3K	72" x 192"	630 kg (1,389 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca



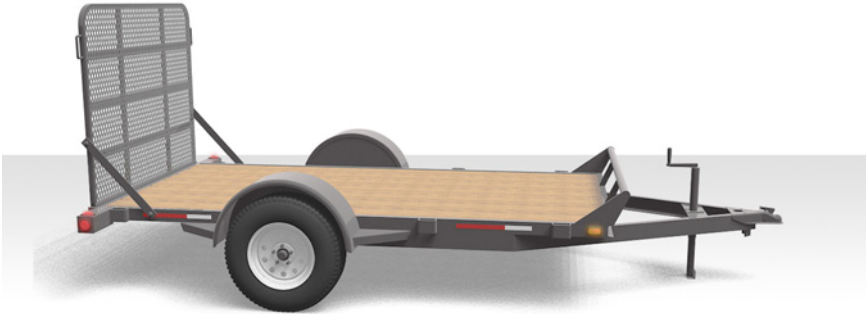

Standard Features & Specifications

GVWR:	1,356 kg (2,990 lbs.)
Axle(s) & Suspension:	(1) 3,500 lbs. Axle w/ Easy Lube Spindles, Double Eye Spring Suspension
Tires:	ST205/75R15 LRC Radial
Coupler:	2" A-frame Coupler
Jack:	2,000 lbs. A-frame Jack
Deck Height:	17"
Ramp:	4' Straight Ramp w/ Mesh
Floor:	Pressure Treated Wood
Tongue Length:	4' Models: 40" 5' Models: 42" 6' Models: 46"
Tie Downs:	<ul style="list-style-type: none"> • Stake Pockets • (4) Welded In D-rings
Spare Tire Mount:	Passenger's Side, Removable
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 4-way Flat Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options


Spare Tire	Torsion Axle
Bifold Ramp	Electric Brakes
Additional D-rings	Aluminum Wheels
5K Axle	Galvanize Trailer


Models

F48-3K	50" x 96"	333 kg (735 lbs.)
F58-3K	60.5" x 96"	357 kg (788 lbs.)
F510-3K	60.5" x 120"	390 kg (860 lbs.)
F512-3K	60.5" x 144"	429 kg (945 lbs.)
F514-3K	60.5" x 168"	464 kg (1,024 lbs.)
F610-3K	72" x 120"	431 kg (951 lbs.)
F612-3K	72" x 144"	475 kg (1,048 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca

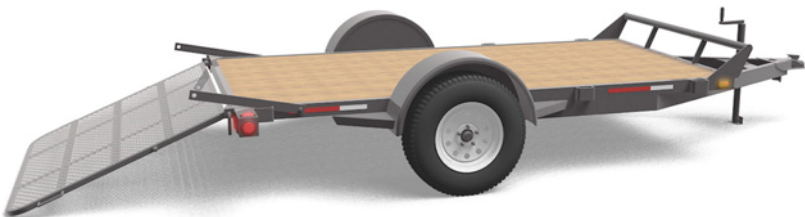

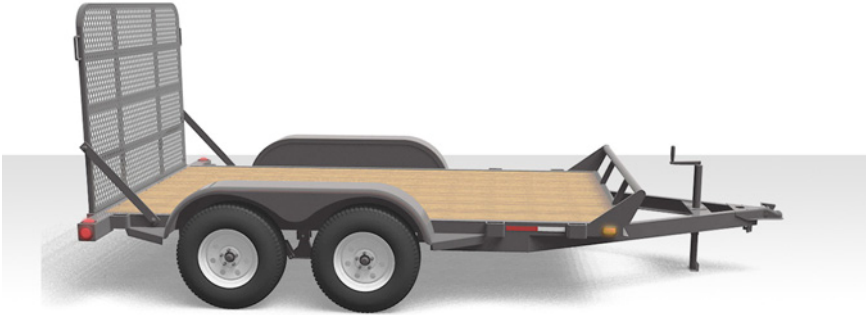

Standard Features & Specifications

GVWR:	1,356 kg (2,990 lbs.)
Axle(s) & Suspension:	(2) 2,200 lbs. Axles w/ Easy Lube Spindles, Double Eye Spring Suspension
Tires:	ST175/80R13 LRC Radial
Coupler:	2" A-frame Coupler
Jack:	2,000 lbs. A-frame Jack
Deck Height:	16"
Ramp:	4' Straight Ramp w/ Mesh
Floor:	Pressure Treated Wood
Tongue Length:	5' Models: 42" 6' Models: 46"
Tie Downs:	<ul style="list-style-type: none"> • Stake Pockets • (4) Welded In D-rings
Spare Tire Mount:	Passenger's Side, Removable
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 4-way Flat Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options


Spare Tire	Torsion Axles
Bifold Ramp	Aluminum Wheels
Additional D-Rings	Galvanize Trailer

Models

MT-F58-3K	60.5" x 96"	418 kg (922 lbs.)
MT-F510-3K	60.5" x 120"	450 kg (993 lbs.)
MT-F512-3K	60.5" x 144"	488 kg (1,076 lbs.)
MT-F514-3K	60.5" x 168"	524 kg (1,156 lbs.)
MT-F610-3K	72" x 120"	492 kg (1,084 lbs.)
MT-F612-3K	72" x 144"	536 kg (1,181 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca

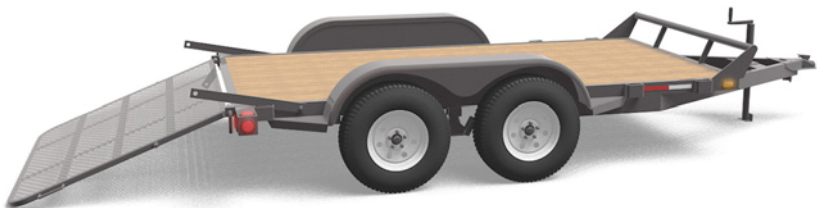



Standard Features & Specifications

GVWR:	3,175 kg (7,000 lbs.)
Axle(s) & Suspension:	(2) 3,500 lbs. Axles w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	ST205/75R15 LRC Radial
Brakes:	Electric on Both Axles
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	2,000 lbs. A-frame Jack
Deck Height:	19"
Sides:	14" Solid Steel + 3" Tie Rail
Ramps:	4' Split Ramps w/ Mesh
Floor:	Pressure Treated Wood
Tongue Length:	53"
Tie Downs:	<ul style="list-style-type: none"> • Stake Pockets • (6) Welded In D-rings
Spare Tire Mount:	Front of Bed, Upright
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options

Spare Tire	Additional D-rings
Lockable Steel Toolbox	Torsion Axles
7,000 lbs. Drop Leg Jack	Aluminum Wheels
Galvanize Trailer	HD Fenders
Rear Stabilizers	

Models

UT712-7K	82" x 145"	817 kg (1,802 lbs.)
UT714-7K	82" x 169"	865 kg (1,908 lbs.)
UT716-7K	82" x 193"	914 kg (2,015 lbs.)
UT718-7K	82" x 217"	961 kg (2,118 lbs.)
UT720-7K	82" x 241"	1,015 kg (2,238 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca





Standard Features & Specifications

GVWR:	10K: 4,490 kg (9,900 lbs.) 14K: 6,350 kg (14,000 lbs.)
Axle(s) & Suspension:	10K: (2) 5,200 lbs. Axles 14K: (2) 7,000 lbs. Axles w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	10K: ST225/75R15 LRD Radial 14K: ST235/80R16 LRE Radial
Brakes:	Electric on Both Axles
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	12,000 lbs. Drop Leg Jack
Deck Height:	20"
Sides:	14" Solid Steel + 3" Tie Rail
Ramps:	5' Heavy Duty Spring-Assisted Split Ramps w/ Mesh
Floor:	Pressure Treated Wood
Tongue Length:	53"
Tie Downs:	<ul style="list-style-type: none"> • Stake Pockets • (6) Welded In D-rings
Spare Tire Mount:	Front of Bed, Upright
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options

Spare Tire	Additional D-rings
Lockable Steel Toolbox	Torsion Axles
Hydraulic Brakes	Aluminum Wheels
Galvanize Trailer	HD Fenders
Rear Stabilizers	

Models

UT716-10K	80" x 193"	1,103 kg (2,432 lbs.)
UT718-10K	80" x 217"	1,153 kg (2,543 lbs.)
UT720-10K	80" x 241"	1,208 kg (2,664 lbs.)
UT722-10K	80" x 265"	1,256 kg (2,770 lbs.)
UT716-14K	80" x 193"	1,174 kg (2,588 lbs.)
UT718-14K	80" x 217"	1,224 kg (2,699 lbs.)
UT720-14K	80" x 241"	1,279 kg (2,819 lbs.)
UT722-14K	80" x 265"	1,327 kg (2,926 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca





Standard Features & Specifications

GVWR:	3,175 kg (7,000 lbs.)
Axle(s) & Suspension:	(2) 3,500 lbs. Axles w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	ST205/75R15 LRC Radial
Brakes:	Electric on Both Axles
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	2,000 lbs. A-frame Jack
Deck Height:	23"
Beavertail:	2' with Wood Floor
Ramps:	4' Ramps, Stowed Under Deck
Floor:	Pressure Treated Wood
Tongue Length:	52"
Tie Downs:	Stake Pockets
Spare Tire Mount:	Passenger's Side, Removable
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options


Spare Tire	7,000 lbs. Drop Leg Jack
Hydraulic Brakes	Lockable Steel Toolbox
5' Spring-Assisted Up-right Ramps	4' Beavertail
Torsion Axles	Straight Deck
Aluminum Wheels	Galvanize Trailer
HD Fenders	

Models

CE714-7K	82" x 168"	871 kg (1,920 lbs.)
CE716-7K	82" x 192"	923 kg (2,035 lbs.)
CE718-7K	82" x 216"	974 kg (2,147 lbs.)
CE720-7K	82" x 240"	1,036 kg (2,285 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca

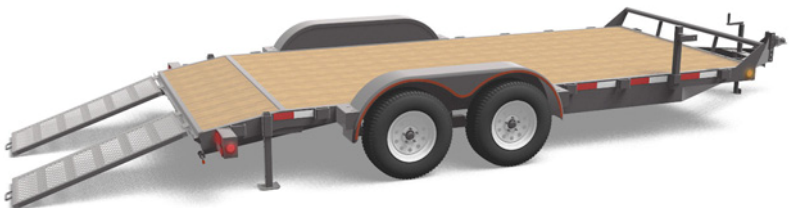



Standard Features & Specifications

GVWR:	10K: 4,490 kg (9,900 lbs.) 14K: 6,350 kg (14,000 lbs.)
Axle(s) & Suspension:	10K: (2) 5,200 lbs. Axles 14K: (2) 7,000 lbs. Axles w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	10K: ST225/75R15 LRD Radial 14K: ST235/80R16 LRE Radial
Brakes:	Electric on Both Axles
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	12,000 lbs. Drop Leg Jack
Deck Height:	24"
Beavertail:	2' with Wood Floor
Ramps:	5' Spring-Assisted Upright Ramps
Floor:	Pressure Treated Wood
Tongue Length:	52"
Tie Downs:	• Stake Pockets & Rub Rails
Spare Tire Mount:	Passenger's Side, Removable
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Note: Legs on ramp optional

Popular Options

Spare Tire	Hydraulic Brakes	Torsion Axles
Straight Deck	Lockable Toolbox	Aluminum Wheels
4' Beavertail	Gooseneck	16K - Two 8K Axles
Galvanize Trailer	5' HD Landscape Ramps	HD Fenders

Models

CE718-8K	80" x 216"	1,045 kg (2,305 lbs.)
CE720-8K	80" x 240"	1,115 kg (2,460 lbs.)
CE714-10K	80" x 168"	1,090 kg (2,403 lbs.)
CE716-10K	80" x 192"	1,150 kg (2,536 lbs.)
CE718-10K	80" x 216"	1,230 kg (2,711 lbs.)
CE720-10K	80" x 240"	1,293 kg (2,850 lbs.)
CE722-10K	80" x 264"	1,347 kg (2,970 lbs.)
CE724-10K	80" x 288"	1,412 kg (3,114 lbs.)
CE714-14K	80" x 168"	1,161 kg (2,559 lbs.)
CE716-14K	80" x 192"	1,221 kg (2,692 lbs.)
CE718-14K	80" x 216"	1,300 kg (2,867 lbs.)
CE720-14K	80" x 240"	1,363 kg (3,005 lbs.)
CE722-14K	80" x 264"	1,418 kg (3,126 lbs.)
CE724-14K	80" x 288"	1,483 kg (3,270 lbs.)
CE718-21KTR	83" x 216"	1,646 kg (3,630 lbs.)
CE720-21KTR	83" x 240"	1,710 kg (3,771 lbs.)
CE722-21KTR	83" x 264"	1,746 kg (3,850 lbs.)
CE724-21KTR	83" x 288"	1,793 kg (3,952 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca





Standard Features & Specifications

GVWR:	7K: 3,175 kg (7,000 lbs.) 10K: 4,490 kg (9,900 lbs.) 14K: 6,350 kg (14,000 lbs.)
Axle(s) & Suspension:	7K: (2) 3,500 lbs. Axles 10K: (2) 5,200 lbs. Axles 14K: (2) 7,000 lbs. Axles w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	7K: ST205/75R15 LRC Radial 10K: ST225/75R15 LRD Radial 14K: ST235/80R16 LRE Radial
Brakes:	Electric on Both Axles
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	<ul style="list-style-type: none"> • 12,000 lbs. Drop Leg Jack • (2) 7,000 lbs. Rear Stabilizing Jacks
Deck Height:	15"
Ramps:	5' Spring-Assisted Upright Ramps
Floor:	Checkerplate Steel
Tongue Length:	5' & 6' Models: 44" 7' Models: 52"
Tie Downs:	<ul style="list-style-type: none"> • Stake Pockets & Rub Rails • (8) D-rings • (3) Recessed Tie Downs on 6x12 and 7x14 models
Spare Tire Mount:	Passenger's Side, Removable
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.

Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options


Spare Tire	Additional D-rings
Hydraulic Brakes	Torsion Axles
Lockable Steel Toolbox	Aluminum Wheels
16K - Two 8K Axles	Heavy Floor
Galvanize Trailer	HD Fenders

Models


SL510-7K	60" x 120"	828 kg (1,825 lbs.)
SL610-10K	72" x 120"	981 kg (2,163 lbs.)
SL612-10K	72" x 144"	1,058 kg (2,332 lbs.)
SL612-14K	72" x 144"	1,128 kg (2,487 lbs.)
SL714-14K	80" x 168"	1,240 kg (2,734 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca

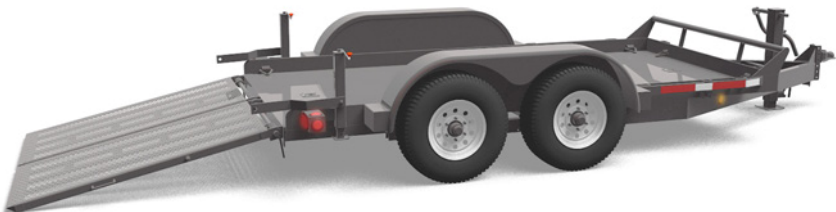

Single Axle Gravity Tilt Trailers

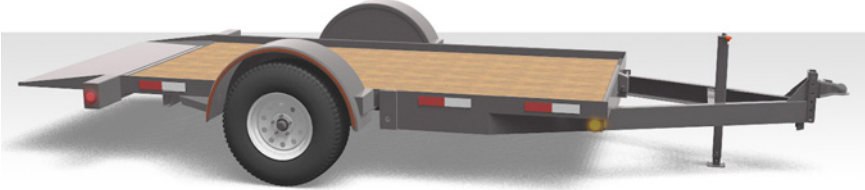

Standard Features & Specifications

GVWR:	5K: 2,360 kg (5,200 lbs.) 7K: 3,175 kg (7,000 lbs.)
Axle(s) & Suspension:	5K: (1) 6,000 lbs. Axle 7K: (1) 7,000 lbs. Axle w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	5K: ST225/75R15 LRD Radial 7K: ST235/80R16 LRE Radial
Brakes:	Electric
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	7,000 lbs. Drop Leg Jack
Deck Height:	20"
Floor:	Pressure Treated Wood
Tongue Length:	52"
Tie Downs:	Stake Pockets, D-rings
Spare Tire Mount:	Passenger's Side, Removable
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug

Finish:	Powder Coat + Scorpion Stone Guard
----------------	------------------------------------

Popular Options


Spare Tire	Additional D-rings
Hydraulic Brakes	Torsion Axle
Lockable Steel Toolbox	Aluminum Wheels
Galvanize Trailer	

Models

TL612-5K	72" x 144"	611 kg (1,346 lbs.)
TL612-7K	72" x 144"	646 kg (1,424 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca

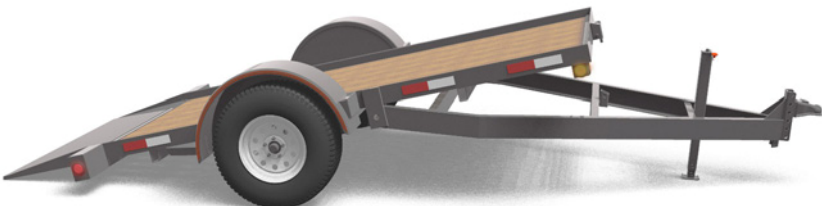



Standard Features & Specifications

GVWR:	10K: 4,490 kg (9,900 lbs.) 14K: 6,350 kg (14,000 lbs.)
Axle(s) & Suspension:	10K: (2) 5,200 lbs. Axles 14K: (2) 7,000 lbs. Axles w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	10K: ST225/75R15 LRD Radial 14K: ST235/80R16 LRE Radial
Brakes:	Electric on Both Axles
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	12,000 lbs. Drop Leg Jack
Tilt Features:	<ul style="list-style-type: none"> • Electric over Hydraulic Full Tilt • 3" Hydraulic Cylinder • Interstate Extreme Cycle Battery • Lockable Steel Toolbox
Deck Height:	24"
Floor:	Pressure Treated Wood
Tongue Length:	52"
Tie Downs:	Stake Pockets & Rub Rails
Spare Tire Mount:	Passenger's Side, Removable
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options

Spare Tire	Torsion Axles
Hydraulic Brakes	Aluminum Wheels
D-rings	Gooseneck
16K - Two 8K Axles	Galvanize Trailer
HD Fenders	

Models

ETL718-10K	80" x 216"	1,254 kg (2,764 lbs.)
ETL720-10K	80" x 240"	1,313 kg (2,894 lbs.)
ETL718-14K	80" x 216"	1,329 kg (2,929 lbs.)
ETL720-14K	80" x 240"	1,388 kg (3,059 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca





Standard Features & Specifications

GVWR:	10K: 4,490 kg (9,900 lbs.) 14K: 6,350 kg (14,000 lbs.)
Axle(s) & Suspension:	10K: (2) 5,200 lbs. Axles 14K: (2) 7,000 lbs. Axles w/ Easy Lube Spindles, Torsion Suspension
Tires:	10K: ST225/75R15 LRD Radial 14K: ST235/80R16 LRE Radial
Brakes:	Electric on Both Axles
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	12,000 lbs. Drop Leg Jack
Tilt Features:	<ul style="list-style-type: none"> • Gravity Tilt with Hydraulic Lock • Hydraulic Cushion Cylinder
Stationary Deck:	4'
Deck Height:	24"
Floor:	Pressure Treated Wood
Tongue Length:	52"
Tie Downs:	Stake Pockets & Rub Rails
Spare Tire Mount:	Passenger's Side, Removable
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options


Spare Tire	D-rings
Hydraulic Brakes	Aluminum Wheels
Lockable Steel Toolbox	Gooseneck
Galvanize Trailer	HD Fenders

Models


TL717-10K	75.5" x 210"	1,146 kg (2,526 lbs.)
TL721-10K	75.5" x 252"	1,261 kg (2,781 lbs.)
TL717-14K	75.5" x 210"	1,230 kg (2,712 lbs.)
TL721-14K	75.5" x 252"	1,346 kg (2,967 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca

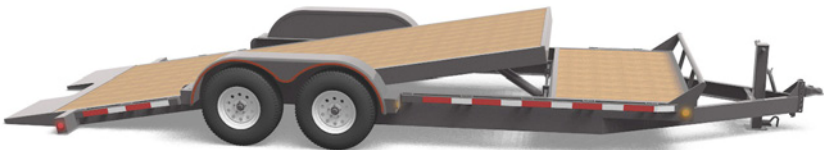

Single Axle Dump Trailers

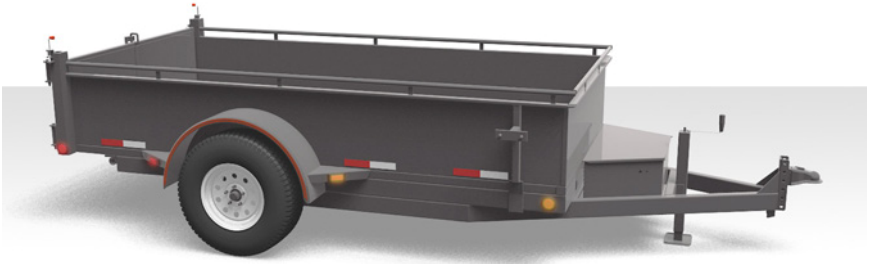

Standard Features & Specifications

GVWR:	5K: 2,360 kg (5,200 lbs.)
Axle(s) & Suspension:	5K: (1) 5,200 lbs. Axle w/ Easy Lube Spindles, Torsion Suspension
Tires:	5K: ST225/75R15 LRD Radial
Brakes:	Electric
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	7,000 lbs. Drop Leg Jack
Hoist Features:	<ul style="list-style-type: none"> • 3,000 psi Hydraulic Power Pack, 20' Hand Remote and Wireless Remote • 3" Hydraulic Cylinder & Scissor Hoist • Interstate Extreme Cycle Battery and Plug in Charger • Lockable Steel Toolbox
Sides:	17-1/2" Solid Steel + 3" Tie Rail
Door:	Barn Doors with Cam Lock
Deck Height:	20"
Floor:	Steel
Tongue Length:	52"
Tie Downs:	(4) Welded In D-rings
Spare Tire Mount:	Passenger's Side of Box

Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options

Spare Tire	Additional D-rings
Hydraulic Brakes	Aluminum Wheels
Tarp and Roller	Galvanize Trailer

Models

DT58-5K	60" x 96"	821 kg (1,809 lbs.)
DT510-5K	60" x 120"	870 kg (1,918 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca





Standard Features & Specifications

GVWR:	7K: 3,175 kg (7,000 lbs.) 10K: 4,490 kg (9,900 lbs.)
Axle(s) & Suspension:	7K: (2) 3,500 lbs. Axles 10K: (2) 5,200 lbs. Axles w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	7K: ST205/75R15 LRC Radial 10K: ST225/75R15 LRD Radial
Brakes:	Electric on Both Axles
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	10' Models: 7,000 lbs. Drop Leg Jack 12' Models: 12,000 lbs. Drop Leg Jack
Hoist Features:	<ul style="list-style-type: none"> • 3,000 psi Hydraulic Power Pack, 20' Hand Remote and Wireless Remote • 5" Hydraulic Cylinder & Scissor Hoist • Interstate Extreme Cycle Battery and Plug in Charger • Lockable Steel Toolbox
Sides:	20" Steel + 10" Wood Plank
Door:	Barn Doors with Cam Lock
Load Cover:	Shielded Tarp & Roller
Deck Height:	22" - 27"
Floor:	Steel
Tongue Length:	52"
Tie Downs:	(4) Heavy Duty Welded In D-rings
Spare Tire Mount:	Passenger's Side of Box
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options

Spare Tire	Additional D-rings
Torsion Axles	Hydraulic Brakes
Aluminum Wheels	Two-way Gate
Tarp Cover	Galanize Trailer
HD Fenders	6' Ramps
Rear Stabilizers	

Models

DT510-7K	60" x 118.5"	1,141 kg (2,516 lbs.)
DT610-7K	71.5" x 118.5"	1,205 kg (2,656 lbs.)
DT510-10K	60" x 118.5"	1,255 kg (2,767 lbs.)
DT610-10K	71.5" x 118.5"	1,308 kg (2,883 lbs.)
DT612-10K	71.5" x 142.5"	1,411 kg (3,111 lbs.)
DT6.512-10K	77.5" x 142.5"	1,494 kg (3,293 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca





Standard Features & Specifications

GVWR:	6,350 kg (14,000 lbs.)
Axle(s) & Suspension:	(2) 7,000 lbs. Drop Axles w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	ST235/80R16 LRE Radial
Brakes:	Electric on Both Axles
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	12,000 lbs. Drop Leg Jack
Hoist Features:	<ul style="list-style-type: none"> • 3,000 psi Hydraulic Power Pack, 20' Hand Remote and Wireless Remote • 10' - 14' Models: 5" Hydraulic Cylinder & Scissor Hoist • 16' Models: 6" Hydraulic Cylinder & Scissor Hoist • Interstate Extreme Cycle Battery with Plug in Charger • Lockable Steel Toolbox
Sides:	20" Steel + 10" Wood Plank
Door:	<ul style="list-style-type: none"> • Barn Doors with Cam Lock • Two-way Gate included with 6.5' Models
Load Cover:	Shielded Tarp & Roller
Deck Height:	25"
Floor:	Steel
Tongue Length:	52"
Tie Downs:	(4) Heavy Duty Welded In D-rings
Spare Tire Mount:	Passenger's Side of Box
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options


Spare Tire	55" High Sides
Tarp Cover	Heavy Gauge Floor
Hydraulic Brakes	Additional D-rings
Two-way Gate (incl. with 6.5' Models)	Torsion Axles
48" High Sides	Aluminum Wheels
Tri-axle 21KTR	Gooseneck
Deckover Option 94" Wide	Galvanize Trailer
HD Fenders	6' Ramps
16K-Two 8K Axles	Rear Stabilizers

Models

DT610-14K	71.5" x 118.5"	1,441 kg (3,177 lbs.)
DT612-14K	71.5" x 142.5"	1,546 kg (3,409 lbs.)
DT6.512-14K	77.5" x 142.5"	1,612 kg (3,554 lbs.)
DT6.514-14K	77.5" x 166.5"	1,745 kg (3,848 lbs.)
DT6.516-14K	77.5" x 190.5"	2,188 kg (4,823 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca

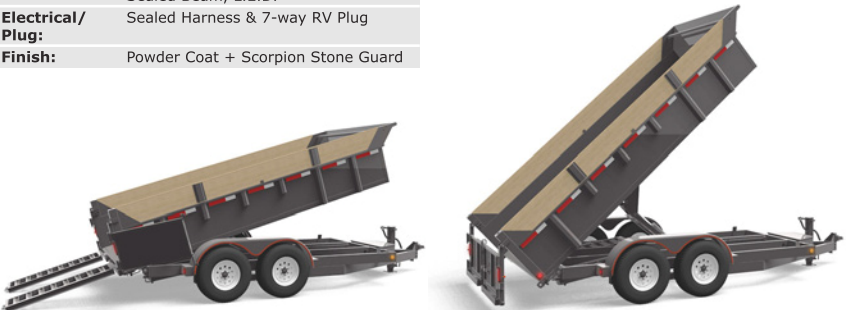

83" Wide Ultra Duty Dump Trailers



Standard Features & Specifications

GVWR:	10K: 4,490 kg (9,900 lbs.) 14K: 6,350 kg (14,000 lbs.)
Axle(s) & Suspension:	10K: (2) 6,000 lbs. Axles 14K: (2) 7,000 lbs. Axles w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	10K: ST225/75R15 LRD Radial 14K: ST235/80R16 LRE Radial
Brakes:	Electric on Both Axles
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	12,000 lbs. Drop Leg Jack
Hoist Features:	<ul style="list-style-type: none"> • 3,000 psi Hydraulic Power Pack, 20' Hand Remote and Wireless Remote • 10' - 14' Models: 5" Hydraulic Cylinder & Scissor Hoist • 16' Models: 6" Hydraulic Cylinder & Scissor Hoist • Interstate Extreme Cycle Battery and Plug In Charger • Lockable Steel Toolbox
Sides:	20" Steel + 10" Wood Plank
Door:	<ul style="list-style-type: none"> • Barn Doors with Cam Lock • Two-way Gate
Load Cover:	Shielded Tarp & Roller
Deck Height:	29"
Floor:	Steel
Tongue Length:	52"
Tie Downs:	(4) Heavy Duty Welded In D-rings
Spare Tire Mount:	Passenger's Side of Box
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options

Spare Tire	55" High Sides
Tarp cover	Heavy Gauge Floor
Hydraulic Brakes	Additional D-rings
48" High Sides	Aluminum Wheels
Tri-axle 21KTR	Gooseneck
Deckover Option 94" Wide	Galvanize Trailer
HD Fenders	6' Ramps
Rear Stabilizers	

Models


DT8312-10K	83" x 142.5"	1,528 kg (3,368 lbs.)
DT8314-10K	83" x 166.5"	1,622 kg (3,575 lbs.)
DT8312-14K	83" x 142.5"	1,640 kg (3,615 lbs.)
DT8314-14K	83" x 166.5"	1,775 kg (3,913 lbs.)
DT8316-14K	83" x 190.5"	2,223 kg (4,901 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca



Straight Deck Pintle Series Trailers

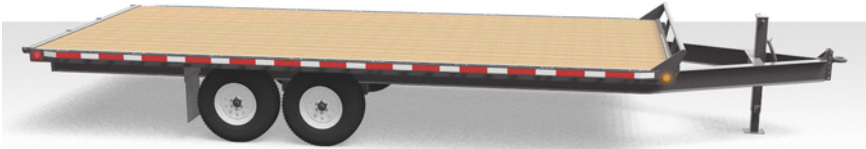

Standard Features & Specifications

GVWR:	7K: 3,175 kg (7,000 lbs.) 10K: 4,490 kg (9,900 lbs.) 14K: 6,350 kg (14,000 lbs.) 21KTR: 9,525 kg (21,000 lbs.) 24KD: 10,890 kg (24,000 lbs.)
Axle(s) & Suspension:	7K: (2) 3,500 lbs. Axles 10K: (2) 5,200 lbs. Axles 14K: (2) 7,000 lbs. Axles 21KTR: (3) 7,000 lbs. Axles 24KD: (2) 12,000 lbs. Axles, Dually w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	7K: ST205/75R15 LRC Radial 10K: ST225/75R15 LRD Radial 14K - 24KD: ST235/80R16 LRE Radial
Brakes:	Electric on All Axles
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	12,000 lbs. Drop Leg Jack
Ramps:	7' Ramps, Stowed Under Deck
Frame:	<ul style="list-style-type: none"> Light Weight, Rigid Frame Crossmembers every 16"
Deck Height:	7K & 10K: 32" 14K - 24KD: 36"
Floor:	Pressure Treated Wood
Tongue:	62"
Tie Downs:	Stake Pockets & Rub Rails
Spare Tire Mount:	Optional - Tongue Mount Only
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options

Spare Tire	Torsion Axles - N/A on 24KD
Winch Track	Hydraulic Brakes
Sliding Winch & Track	D-rings
Lockable Steel Toolbox	Aluminum Wheels
16K - Two 8K Axles	30KD - Two 15K Axles
Galvanize Trailer	Dual 12K Jacks


Models

SD16-7K	102" x 192"	1,295 kg (2,855 lbs.)
SD18-7K	102" x 216"	1,368 kg (3,015 lbs.)
SD20-7K	102" x 240"	1,455 kg (3,208 lbs.)
SD16-10K	102" x 192"	1,405 kg (3,098 lbs.)
SD18-10K	102" x 216"	1,483 kg (3,269 lbs.)
SD20-10K	102" x 240"	1,575 kg (3,473 lbs.)
SD24-10K	102" x 288"	1,797 kg (3,961 lbs.)
SD16-14K	102" x 192"	1,476 kg (3,254 lbs.)
SD18-14K	102" x 216"	1,554 kg (3,425 lbs.)
SD20-14K	102" x 240"	1,646 kg (3,629 lbs.)
SD24-14K	102" x 288"	1,867 kg (4,117 lbs.)
SD18-21KTR	102" x 216"	1,895 kg (4,178 lbs.)
SD20-21KTR	102" x 240"	1,994 kg (4,395 lbs.)
SD24-21KTR	102" x 288"	2,177 kg (4,799 lbs.)
SD28-21KTR	102" x 336"	2,363 kg (5,209 lbs.)
SD30-21KTR	102" x 360"	2,496 kg (5,502 lbs.)
SD20-24KD	102" x 240"	2,306 kg (5,083 lbs.)
SD24-24KD	102" x 288"	2,494 kg (5,498 lbs.)
SD28-24KD	102" x 336"	2,710 kg (5,975 lbs.)
SD30-24KD	102" x 360"	2,814 kg (6,204 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca



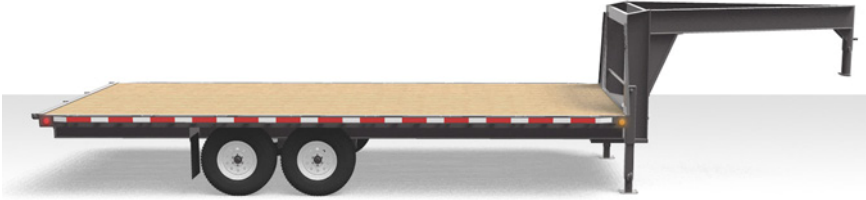

Standard Features & Specifications

GVWR:	14K: 6,350 kg (14,000 lbs.) 21KTR: 9,525 kg (21,000 lbs.) 24KD: 10,890 kg (24,000 lbs.)
Axle(s) & Suspension:	14K: (2) 7,000 lbs. Axles 21KTR: (3) 7,000 lbs. Axles 24KD: (2) 12,000 lbs. Axles, Dually w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	ST235/80R16 LRE Radial
Brakes:	Electric on All Axles
Coupler:	Adjustable Gooseneck Coupler
Jacks:	(2) 12,000 lbs. Drop Leg Jacks
Ramps:	7' Ramps, Stowed Under Deck
Frame:	<ul style="list-style-type: none"> Light Weight, Rigid Frame Crossmembers every 16"
Deck Height:	36"
Floor:	Pressure Treated Wood
Gooseneck Length:	9'
Tie Downs:	Stake Pockets & Rub Rails
Spare Tire Mount:	On Gooseneck
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options


Spare Tire	Torsion Axles - N/A on 24KD
Winch Track	Hydraulic Brakes
Sliding Winch & Track	D-rings
Lockable Steel Toolbox	Aluminum Wheels
King Pin	16K - Two 8K Axles
30KD - Two 15K Axles	Galvanize Trailer

Models

GNSD16-14K	102" x 192"	1,758 kg (3,875 lbs.)
GNSD18-14K	102" x 216"	1,838 kg (4,051 lbs.)
GNSD20-14K	102" x 240"	1,995 kg (4,398 lbs.)
GNSD24-14K	102" x 288"	2,205 kg (4,861 lbs.)
GNSD18-21KTR	102" x 216"	2,100 kg (4,629 lbs.)
GNSD20-21KTR	102" x 240"	2,220 kg (4,894 lbs.)
GNSD24-21KTR	102" x 288"	2,432 kg (5,362 lbs.)
GNSD28-21KTR	102" x 336"	2,621 kg (5,779 lbs.)
GNSD30-21KTR	102" x 360"	2,698 kg (5,947 lbs.)
GNSD20-24KD	102" x 240"	2,477 kg (5,461 lbs.)
GNSD24-24KD	102" x 288"	2,693 kg (5,938 lbs.)
GNSD28-24KD	102" x 336"	2,884 kg (6,358 lbs.)
GNSD30-24KD	102" x 360"	3,001 kg (6,615 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca

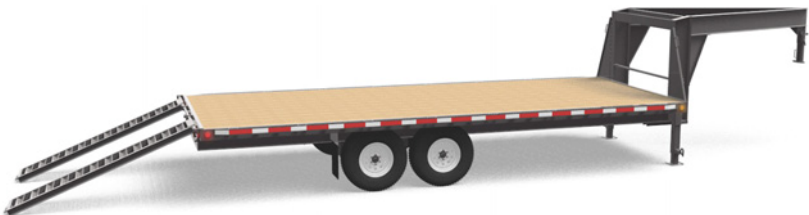



Standard Features & Specifications

GVWR:	7K: 3,175 kg (7,000 lbs.) 10K: 4,490 kg (9,900 lbs.) 14K: 6,350 kg (14,000 lbs.) 24KD: 10,890 kg (24,000 lbs.)
Axle(s) & Suspension:	7K: (2) 3,500 lbs. Axles 10K: (2) 5,200 lbs. Axles 14K: (2) 7,000 lbs. Axles 24KD: (2) 12,000 lbs. Axles, Dually w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	7K: ST205/75R15 LRC Radial 10K: ST225/75R15 LRD Radial 14K - 24KD: ST235/80R16 LRE Radial
Brakes:	Electric on All Axles
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	12,000 lbs. Drop Leg Jack
Beavertail:	5' Beavertail with Wood Floor
Ramps:	5' Spring-Assisted Wedge Ramps
Frame:	<ul style="list-style-type: none"> Light Weight, Rigid Frame Crossmembers every 16"
Deck Height:	7K & 10K: 32" 14K - 24KD: 36"
Floor:	Pressure Treated Wood
Tongue:	62"
Tie Downs:	Stake Pockets & Rub Rails
Spare Tire Mount:	Optional - Tongue Mount Only
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options

Spare Tire	Torsion Axles - N/A on 24KD
Winch Track	Hydraulic Brakes
Sliding Winch & Track	D-rings
Lockable Steel Toolbox	Aluminum Wheels
16K - Two 8K Axles	30KD - Two 15K Axles
Galvanize Trailer	Dual 12K Jacks
Mega Ramps	

Models


BT20-7K	102" x 240"	1,591 kg (3,508 lbs.)
BT20-10K	102" x 240"	1,716 kg (3,783 lbs.)
BT25-10K	102" x 300"	1,950 kg (4,299 lbs.)
BT20-14K	102" x 240"	1,787 kg (3,939 lbs.)
BT25-14K	102" x 300"	2,020 kg (4,453 lbs.)
BT25-21KTR	102" x 300"	2,303 kg (5,078 lbs.)
BT28-21KTR	102" x 336"	2,466 kg (5,436 lbs.)
BT30-21KTR	102" x 360"	2,555 kg (5,633 lbs.)
BT25-24KD	102" x 300"	2,608 kg (5,749 lbs.)
BT28-24KD	102" x 336"	2,770 kg (6,107 lbs.)
BT30-24KD	102" x 360"	2,864 kg (6,313 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca



Beavertail Gooseneck Series Trailers

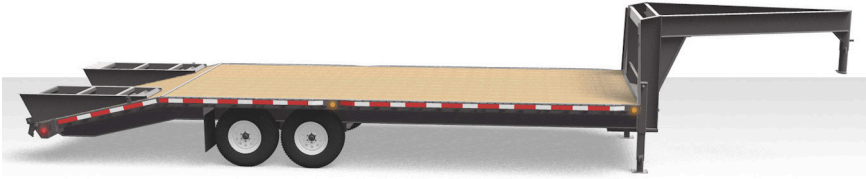

Standard Features & Specifications

GVWR:	14K: 6,350 kg (14,000 lbs.) 21KTR: 9,525 kg (21,000 lbs.) 24KD: 10,890 kg (24,000 lbs.)
Axle(s) & Suspension:	14K: (2) 7,000 lbs. Axles 21KTR: (3) 7,000 lbs. Axles 24KD: (2) 12,000 lbs. Axles, Dually w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	ST235/80R16 LRE Radial
Brakes:	Electric on All Axles
Coupler:	Adjustable Gooseneck Coupler
Jacks:	(2) 12,000 lbs. Drop Leg Jacks
Beavertail:	5' Beavertail with Wood Floor
Ramps:	5' Spring-Assisted Wedge Ramps
Frame:	<ul style="list-style-type: none"> Light Weight, Rigid Frame Crossmembers every 16"
Deck Height:	36"
Floor:	Pressure Treated Wood
Gooseneck Length:	9'
Tie Downs:	Stake Pockets & Rub Rails
Spare Tire Mount:	On Gooseneck
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options


Spare Tire	Spring Assisted Pop-up Centre on Beavertail
Winch Track	Torsion Axles - N/A on 24KD
Sliding Winch & Track	Hydraulic Brakes
Lockable Steel Toolbox	D-rings
King Pin	Aluminum Wheels
16K - Two 8K Axles	30KD - Two 15K Axles
Galvanze Trailer	Mega Ramps

Models

GNBT20-14K	102" x 240"	2,077 kg (4,580 lbs.)
GNBT25-14K	102" x 300"	2,321 kg (5,116 lbs.)
GNBT25-21KTR	102" x 300"	2,524 kg (5,564 lbs.)
GNBT28-21KTR	102" x 336"	2,660 kg (5,864 lbs.)
GNBT30-21KTR	102" x 360"	2,751 kg (6,066 lbs.)
GNBT25-24KD	102" x 300"	2,814 kg (6,203 lbs.)
GNBT28-24KD	102" x 336"	2,958 kg (6,522 lbs.)
GNBT30-24KD	102" x 360"	3,020 kg (6,659 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca

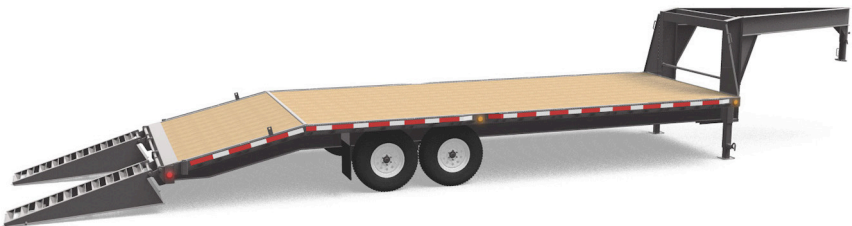



Standard Features & Specifications

GVWR:	14K: 6,350 kg (14,000 lbs.) 21KTR: 9,525 kg (21,000 lbs.) 24KD: 10,890 kg (24,000 lbs.)
Axle(s) & Suspension:	14K: (2) 7,000 lbs. Axles 21KTR: (3) 7,000 lbs. Axles 24KD: (2) 12,000 lbs. Axles, Dually w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	ST235/80R16 LRE Radial
Brakes:	Electric on All Axles
Coupler:	Adjustable 3" Lunette Eye
Jack:	12,000 lbs. Drop Leg Jack
Beavertail:	5' Beavertail with Checkerplate Steel Floor & Spring Assisted Pop-up Centre
Ramps:	5' Spring-Assisted Wedge Ramps
Frame:	<ul style="list-style-type: none"> 12" @ 19 lbs. Heavy Wide-Flange Beams Crossmembers every 16" Flex Resisting Bridge
Deck Height:	36"
Floor:	Pressure Treated Wood
Tongue:	62"
Tie Downs:	Stake Pockets & Rub Rails
Side Steps:	On Both Sides
Winch Track:	Driver's Side
Spare Tire Mount:	Optional - Tongue Mount Only
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options

Spare Tire	Hydraulic Brakes
Lockable Steel Toolbox	D-Rings
6' Tongue	Aluminum Wheels
16K - Two 8K Axles	Torsion Axles - N/A on 24KD
30KD - Two 15K Axles	Galvanize Trailer
Dual 12K Jacks	Mega Ramps


Models

PHFT20-14K	102" x 240"	2,275 kg (5,015 lbs.)
PHFT25-14K	102" x 300"	2,555 kg (5,632 lbs.)
PHFT28-14K	102" x 336"	2,737 kg (6,035 lbs.)
PHFT30-14K	102" x 360"	2,882 kg (6,354 lbs.)
PHFT32-14K	102" x 384"	2,990 kg (6,592 lbs.)
PHFT20-21KTR	102" x 240"	2,480 kg (5,467 lbs.)
PHFT25-21KTR	102" x 300"	2,757 kg (6,078 lbs.)
PHFT28-21KTR	102" x 336"	2,940 kg (6,481 lbs.)
PHFT30-21KTR	102" x 360"	3,084 kg (6,800 lbs.)
PHFT32-21KTR	102" x 384"	3,192 kg (7,038 lbs.)
PHFT20-24KD	102" x 240"	2,747 kg (6,055 lbs.)
PHFT25-24KD	102" x 300"	3,020 kg (6,657 lbs.)
PHFT28-24KD	102" x 336"	3,201 kg (7,057 lbs.)
PHFT30-24KD	102" x 360"	3,348 kg (7,381 lbs.)
PHFT32-24KD	102" x 384"	3,455 kg (7,618 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca



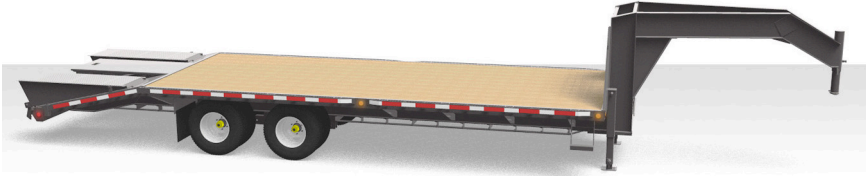

Standard Features & Specifications

GVWR:	14K: 6,350 kg (14,000 lbs.) 21KTR: 9,525 kg (21,000 lbs.) 20KD: 9,070 kg (20,000 lbs.) 24KD: 10,890 kg (24,000 lbs.)
Axle(s) & Suspension:	14K: (2) 7,000 lbs. Axles 21KTR: (3) 7,000 lbs. Axles 24KD: (2) 12,000 lbs. Axles, Dually w/ Easy Lube Spindles, Slipper Spring Suspension
Tires:	ST235/80R16 LRE Radial
Brakes:	Electric on All Axles
Coupler:	Adjustable Gooseneck Coupler
Jacks:	(2) 12,000 lbs. Drop Leg Jacks
Beavertail:	5' Beavertail with Checkerplate Steel Floor & Spring Assisted Pop-up Centre
Ramps:	5' Spring-Assisted Wedge Ramps
Frame:	<ul style="list-style-type: none"> 12" @ 19 lbs. Heavy Wide-Flange Beams Crossmembers every 16" Flex Resisting Bridge
Deck Height:	36"
Floor:	Pressure Treated Wood
Gooseneck Length:	9'
Tie Downs:	Stake Pockets & Rub Rails
Side Steps:	On Both Sides
Winch Track:	Driver's Side
Storage:	Lockable Steel Toolbox
Spare Tire Mount:	On Gooseneck
Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options


Spare Tire	Hydraulic Brakes
King Pin	D-Rings
Torsion Axles - N/A on 24KD	Aluminum Wheels
16K - Two 8K Axles	30KD - Two 15K Axles
Galvanize Trailer	Mega Ramps

Models

GNFT20-14K	102" x 240"	2,475 kg (5,457 lbs.)
GNFT25-14K	102" x 300"	2,780 kg (6,129 lbs.)
GNFT28-14K	102" x 336"	2,940 kg (6,481 lbs.)
GNFT30-14K	102" x 360"	3,084 kg (6,800 lbs.)
GNFT32-14K	102" x 384"	3,187 kg (7,027 lbs.)
GNFT20-21KTR	102" x 240"	2,678 kg (5,904 lbs.)
GNFT25-21KTR	102" x 300"	2,976 kg (6,562 lbs.)
GNFT28-21KTR	102" x 336"	3,136 kg (6,914 lbs.)
GNFT30-21KTR	102" x 360"	3,281 kg (7,233 lbs.)
GNFT32-21KTR	102" x 384"	3,384 kg (7,460 lbs.)
GNFT20-24KD	102" x 240"	2,941 kg (6,483 lbs.)
GNFT25-24KD	102" x 300"	3,240 kg (7,143 lbs.)
GNFT28-24KD	102" x 336"	3,397 kg (7,489 lbs.)
GNFT30-24KD	102" x 360"	3,543 kg (7,812 lbs.)
GNFT32-24KD	102" x 384"	3,647 kg (8,040 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca

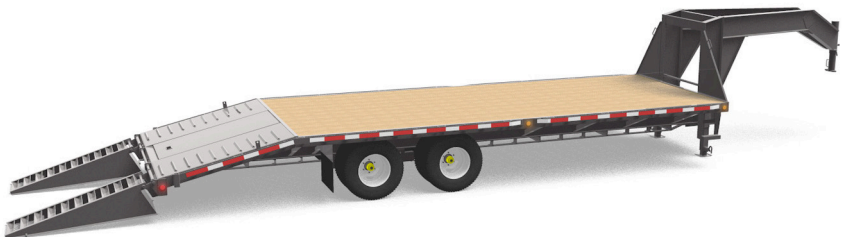

Deck Over Hydraulic Power-Tilt Trailers



New Model

Standard Features & Specifications

GVWR:	14K: 6,350 kg (14,000 lbs.)
Axle(s) & Suspension:	14K: (2) 7,000 lbs. Axles w/Easy Lube Spindles, Slipper Spring Suspension
Tires:	14K: ST235/80R16 LRE Radial
Brakes:	Electric on All Axles
Coupler:	Adjustable 2-5/16" Coupler or 3" Lunette Eye
Jack:	12,000 lbs. Drop Leg Jack
Hoist Features:	Electric Over Hydraulic Full Deck Power Up/Power Down Tilt 20' Hand Remote 5" Hydraulic Cylinder Interstate Extreme Cycle Battery and Plug in Charger Lockable Steel Toolbox
Frame:	7" Channel Tongue 7" Channel Lower Main Frame Upper Deck - 10" I-Beam Inner Main Frame Upper Deck - 5" Channel Outer Frame 3" Crossmembers spaced 16" OC 24" Checkerplate Knife Edge
Deck Height:	14K - 36"
Floor:	Pressure Treated Wood
Tongue Length:	62"
Tie Downs:	Rub Rails and Stake Pockets
Spare Tire Mount:	Tongue Mount Only

Lights:	Transport Canada & D.O.T. Approved, Sealed Beam, L.E.D.
Electrical/ Plug:	Sealed Harness & 7-way RV Plug
Finish:	Powder Coat + Scorpion Stone Guard

Popular Options

Spare Tire	D-rings
Hydraulic Brakes	Gooseneck
Winch Plate	Aluminum Wheels
Galvanize Trailer	Sliding Winch Track
24'/26' 21KTR	

Models

ETL822-14K	102" x 264"	1,996 kg (4,400 lbs.)
ETL824-14K	102" x 288"	2,086 kg (4,600 lbs.)

Dealer Information & Pricing

Canada Trailer Atlantic
Brittany Pothier
(902)-441-2901
(e) ohb@pothier.ns.ca





Canada Trailers Manufacturing Limited

11918 Imperial Road, Hwy. 73
Aylmer, Ontario
N5H 2R3

Phone: 519.765.1717

Fax: 519.765.1725

www.canadatrailers.com